



TELECOM & SECURITY

be able with cable




PRODUCT DATASHEET

KBM


CaP System
BNC MALE CONNECTOR

ROHS
COMPLIANT

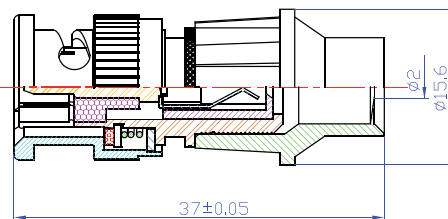


Utilize
these Tools

Stripping Dimension:

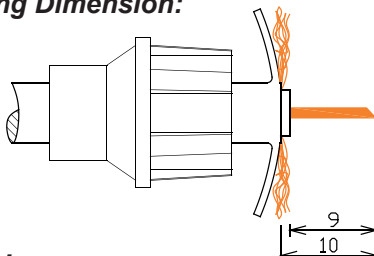

Return Loss:

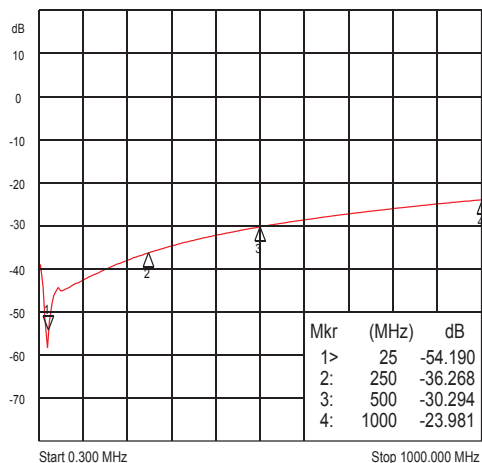

Suitable for Cables:

RG6 quad, RG6, RG59, RG178, ... suitable for all cable with inner conductor from Ø 0,3 up to Ø 1,1 mm (from AWG 28 to AWG 18)

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 500 Veff
Insulation res: 5000 M-Ohm
Screening Immunity: Class A+

Mechanical Specification

Body Material: Brass - Nickel plated
Center Contact: Brass - Gold plated
Shrapnel: P. Bronze - Nickel plated
Insulator: Derlin
Bayonet Cap: Zinc - Nickel plated
Gasket: Silicone
Washer: Fe - Nickel plated
Spring: SK5 - Nickel plated
Inner Retaining Ring: Fe - Nickel plated
CaP®: Protected Plastic Compound
Weight: 11.4 g

Environmental Specification

Operating Temp: - 40 ÷ + 120 °C

TELECOM & SECURITY: Viale Stefano Tinozzi, 3 - Zona Ind.le Interporto d'Abruzzo - 65024 Manoppello (PE) - ITALY
Tel. +39.085.8569020 - Fax +39.085.8569707 - www.telecomsecurity.it - info@telecomsecurity.it - Skype: telecomsecurity_info

Technical data and characteristics are not binding and may be changed without prior notice