



TELECOM & SECURITY

be able with cable




PRODUCT DATASHEET

KBM-HQ

CaP System
BNC MALE CONNECTOR
HIGH QUALITY: R. L. > 30 dB




ROHS
COMPLIANT

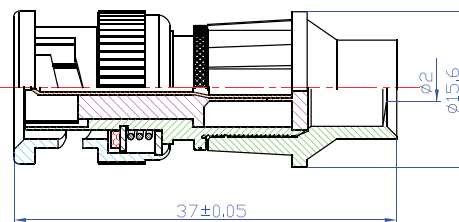


Use
these Tools

Stripping Dimension:

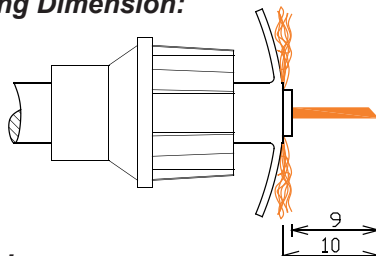

Return Loss:

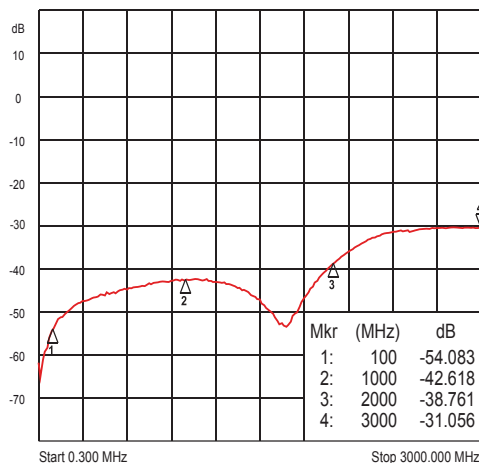

Suitable for Cables:

RG6 quad, RG6, RG59, RG178, ... suitable for all cable with inner conductor from Ø 0,3 up to Ø 1,1 mm (from AWG 28 to AWG 18)

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-3 GHz
Return Loss: > 30 db @ 3 GHz
Dielectric W/V: 500 Veff
Insulation res: 5000 M-Ohm
Screening Immunity: Class A+

Mechanical Specification

Body Material: Brass - Gold plated
Center Contact: Beryllium Copper - Gold plat.
Insulator: HDPE
Bayonet Cap: Zinc - Black Nickel plated
Gasket: Rubber
Washer: Fe - Nickel plated
Spring: SK5 - Nickel plated
Inner Retaining Ring: Fe - Nickel plated
CaP®: Protected Plastic Compound
Weight: 9.8 g

Environmental Specification

Operating Temp: - 40 ÷ + 120 °C

TELECOM & SECURITY: Viale Stefano Tinozzi, 3 - Zona Ind.le Interporto d'Abruzzo - 65024 Manoppello (PE) - ITALY
Tel. +39.085.8569020 - Fax +39.085.8569707 - www.telecomsecurity.it - info@telecomsecurity.it - Skype: telecomsecurity_info

Technical data and characteristics are not binding and may be changed without prior notice