



Technical data sheet Junction box T 160, plug-in seal

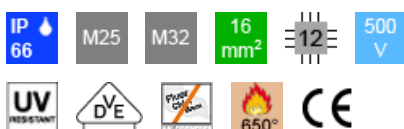

The junction boxes are made of a thermoplastic polypropylene polymer with plug-in seals made of ethylene vinyl acetate (EVA). This allows installation of cables either directly through the 7x M25 + 5x M32 seals, or the seals can be cut with a knife at the pre-marked points, in order to create an insertion opening for cables or pipes. Alternatively, cable glands can be pushed through the openings instead of the seals and locked with a locknut from the inside. The junction boxes can be mounted on mounting plates in the openings on the floor using steel screws 3.5 x 9.5. Clear internal dimensions: 176 x 135 x 67 mm. Cover with labelling panel and lead-sealed.

Standard version: flame-resistant, testing temperature 650 °C.
F version: highly flame-resistant, testing temperature 960 °C.

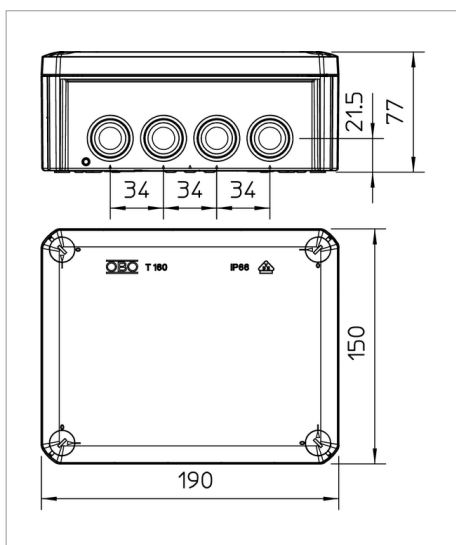

Type	Version	Entries	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 160	Standard	7 x M25 5 x M32	Light grey; RAL 7035	20	1	30.000	2007093
T 160 RW		7 x M25 5 x M32	Pure white; RAL 9010	20	1	30.000	2007541
T 160 M32	Large entry	10 x M32	Light grey; RAL 7035	20	1	30.000	2007097
T 160 F	960 °C flame-resistant	7 x M25 5 x M32	Light grey; RAL 7035	20	1	30.000	2007355
T 160 RO-LGR	With red lid	7 x M25 5 x M32	Red grey	20	1	30.000	2007649
T 160 HEB		7 x M25 5 x M32	Light ivory; RAL 1015	20	1	30.000	2007593
T 160 KL	With terminal strip	7 x M25 5 x M32	Light grey; RAL 7035	20	1	64.200	2007440

PPGFR Polypropylene, Glass-fibre reinforced

/100