

Technical data sheet T 250, closed




The junction boxes are made of a thermoplastic polypropylene polymer with closed side walls. This means that the required openings can be made wherever they are required. EDK plug-in seals or cable glands with locknuts can be inserted in these openings, to allow cable insertion.

The junction boxes can be mounted on mounting plates in the openings on the floor using steel screws 3.5 x 9.5.

Clear internal dimensions: 225 x 173 x 86 mm

Cover with labelling panel and lead-sealed.


Standard version: flame-resistant, testing temperature 650 °C.

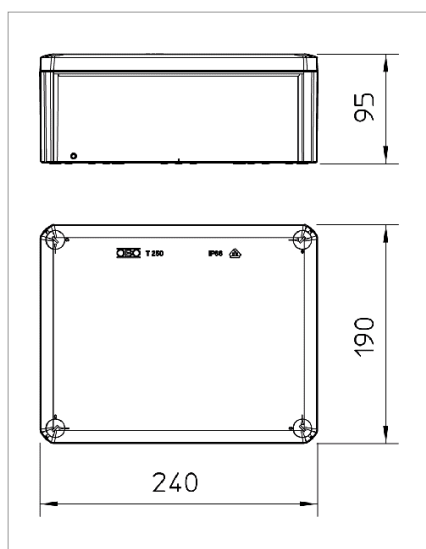

Type	Version	Entries	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 250 OE	Closed	None	Light grey; RAL 7035	8	1	48.300	2007287

PP/GF Polypropylene, fibreglass-reinforced

E /100 pc.



Legend



Protection rating IP 66



Nominal cross-section 25 mm²



Nominal voltage 500 V



Communautés Européennes, EC declaration of conformity according to EC directives



Verband der Elektrotechnik, Elektronik, Informationstechnik e.V., Germany



Halogen-free; without chlorine, fluorine and bromine



Flame resistant 650 °C